

INFRARED DETECTOR

ATTO256-02

256x 192 – 12 μm

Based on continuous customers feedback, LYNRED has improved its 12 μm technology for the ATTO products family.

Offering fluid and crisp images with low power consumption, ATTO256-02 combines key values to meet the requirements of commercial applications.

HIGHER SENSITIVITY FOR LIMITLESS APPLICATIONS

- FLUID AND CRISP IMAGES
- SEAMLESS INTEGRATION
- OPTIMIZED TOTAL COST OF OWNERSHIP

LEISURE



SURVEILLANCE




FIREFIGHTING




THERMOGRAPHY



ATTO256-02



COMPACT



FULL DIGITAL



LOW POWER CONSUMPTION



SEAMLESS INTEGRATION

FLUID AND CRISP IMAGES

Resolution	■ 256 x 192
Sharp contrast	■ Thermal sensitivity < 50 mK (f/1, 300K, 60Hz) ■ [-40°C; +85°C] operating temperature range
Fluid and smooth image	■ Frame rate up to 60Hz
High uniformity	■ Array operability > 99.8%


SEAMLESS INTEGRATION

Simplified electronic design	■ Full digital component
High volume compliant	■ Surface-mount Device (J-Lead44) ■ Compatible with JEDEC's reflow and handling standards
Flexible configuration	■ Full access to sensor features (I ² C) ■ Free-run or external trigger mode

OPTIMIZED TOTAL COST OF OWNERSHIP

Reduced optic size and cost	■ 12 μm pixel pitch
Simplified image processing	■ Predictable behavior ■ TECless, Shutterless compatible
Battery optimization	■ Low power consumption < 220 mW ■ Digital mode

Human recognition distance with f/1 optics (perfect OTF & 88% typical transmission)

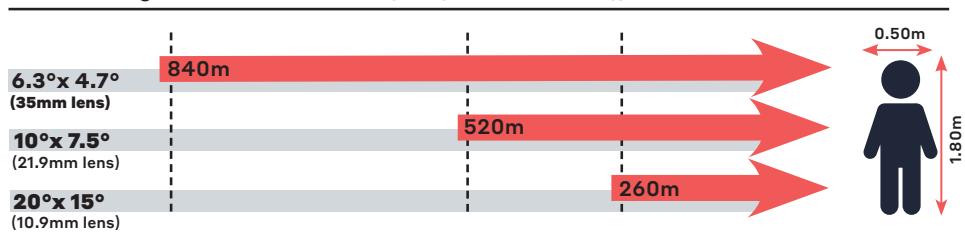

Range for Johnson's criteria @ 50% probability, 2K DeltaT vs background, perfect atmosphere, real LYNRED pixel MTF, sensor NETD = 50mK



LYNRED HEADQUARTERS
Avenue de la Vauve - CS 20018
91127 Palaiseau - France
Phone +33 (0)1 60 92 18 30
info@lynred.com

DEVELOPMENT AND PRODUCTION CENTER
Actipole - CS 10021 - 364, route de Valence
38113 Veurey-Voroize - France
Phone +33 (0)4 76 28 77 00
info@lynred.com